

The **Norbulb N2.5 mm** is a thermal release element for fire protection applications. The enclosed fluid will expand with rising temperature, increasing the internal pressure until the glass bulb bursts into small particles at the defined operating temperature.

The **N2.5 mm** glass bulb is designed to meet the requirements of FM and UL for ESFR and Fast Response type sprinkler applications. It is available in all common temperature ratings. The actuation temperature is within  $\pm 3.5\%$  of the nominal temperature ( $^{\circ}\text{F}$ ).

Colour Code	Nominal Temperature*	
	Celsius	Fahrenheit
Orange	57°C	135°F
Red	68°C	155°F
Yellow	79°C	175°F
Green	93°C	200°F
Blue	141°C	286°F

\* further temperatures on request


The internally reinforced ends, conical reduced towards the mid-section, allow a smooth transition of high assembly forces directly into the shaft. This novel design gives the **N2.5 mm** glass bulb a slender appearance, highly sensitive, yet strong and robust.

Strength*	kN		lb	
	regular	XS	regular	XS
Average >	2.5	3.5	550	770
LTL >	1.0	2.0	220	440

\* minimum values

The filling fluids used in our **N2.5 mm** glass bulbs are patented (US Patent No. 5,890,543) and result in a superior extra Fast Response performance.

$RTI_c$ [ $c = 0,5(m/s)^{1/2}$ ]	25 (ms) <sup>1/2</sup>	45 (fts) <sup>1/2</sup>
----------------------------------	------------------------	-------------------------

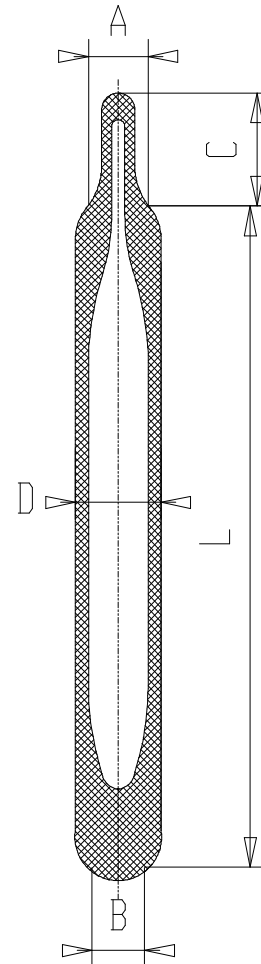

Do not scale

Dimensions	mm	inch
Diameter D	2.4	.094
Length L <sub>1</sub>	19.5 - 20.5	.768 - .807
XS L <sub>2</sub>	15.5 - 16.5	.610 - .650
Capillary C	max 4.0	max .157
Seat dia. A	1.8	.070
Seat dia. B	1.8	.070

The glass bulbs allow a safe self-aligning assembly and are compatible with all current seat designs. Technical Specification data for reference only. Right for alterations reserved.

